

Assignment 1

Structural Pattern Recognition

Marius Bulacu and Lambert Schomaker

AI Institute, Groningen University, The Netherlands

1 Main steps

- define a set of structural elements (primitives)
- define a method to describe the relationship between these elements
- apply your schema to the proposed patterns
- analyze the obtained descriptions
- refine your approach in order to eliminate ambiguities

2 Examples

To get some inspiration on how to solve the proposed examples, you should consult the course slides.

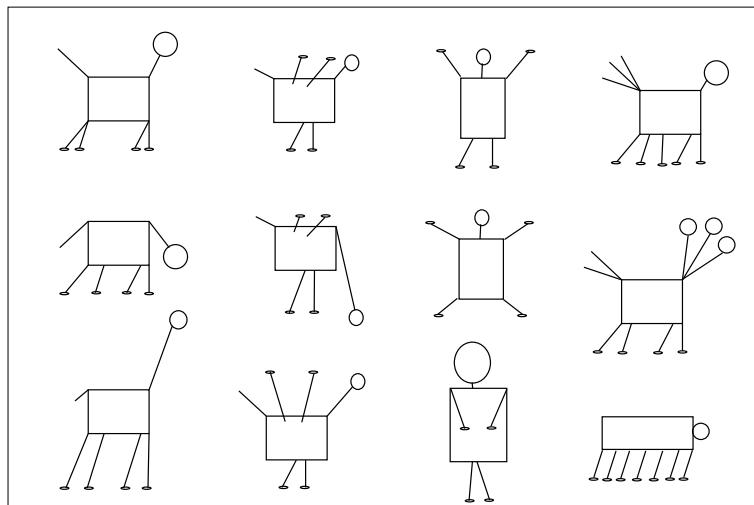


Fig. 1. Caricatural animals

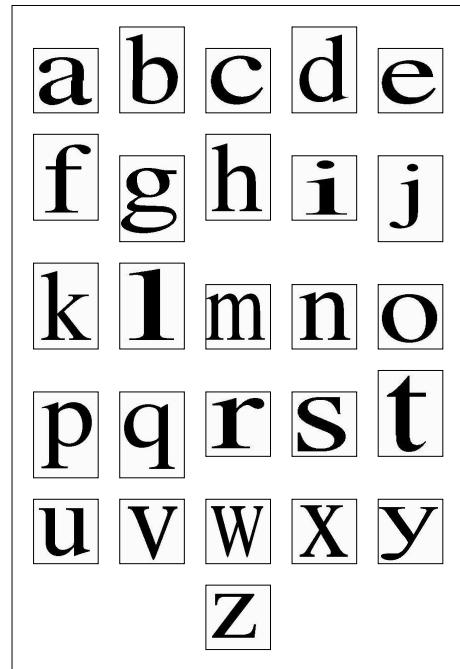


Fig. 2. Machine-print fonts 1/3

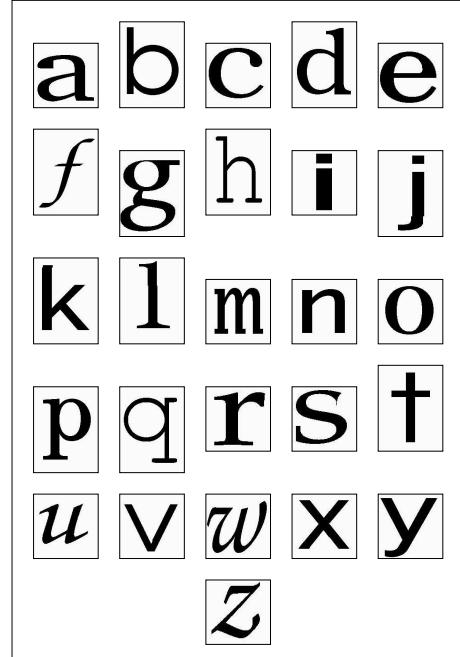


Fig. 3. Machine-print fonts 2/3

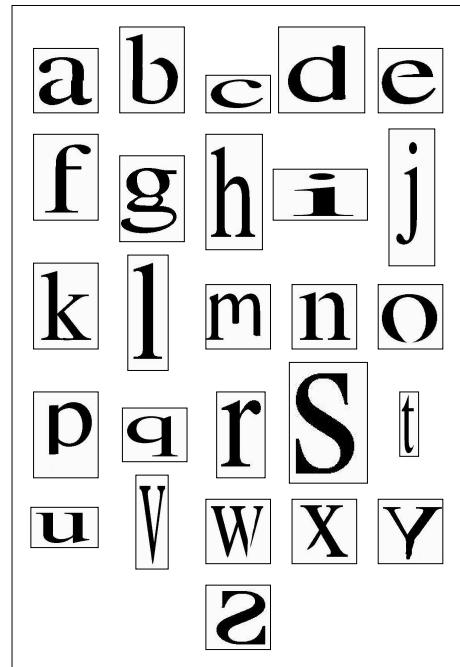


Fig. 4. Machine-print fonts 3/3

A Tutorial on Hidden Markov Models and Selected Applications in Speech Recognition

LAWRENCE R. RABINER, FELLOW, IEEE

Although initially introduced and studied in the late 1960s and early 1970s, statistical methods of Markov source or hidden Markov models have only recently begun to receive widespread attention in recent years. There are two strong reasons why this has occurred. First the models are very rich in mathematical structure and hence can describe many different types of processes in a natural way. Second, the models, when applied properly, work very well in practice. This paper will attempt to introduce the reader to the basic concepts. Second, it will fully and methodically review the theoretical aspects of this type of model. Finally, it will present several applications of the models to selected problems in machine recognition of speech.

1. INTRODUCTION

Real-world processes generally produce observable outputs which can be characterized as signals. The signals can be discrete events (e.g., a character in an alphabet, discrete events in a codebook, etc.) or continuous in nature (e.g., speech samples, temperature measurements, music, etc.). The signal source can be stationary (i.e., its statistical properties do not change with time), or nonstationary (i.e., the signal properties vary with time). The signals can be pure (i.e., coming strictly from a single source), or can be corrupted by other signal sources (e.g., noise) or by transmission distortion.

A problem of fundamental interest is characterizing such real-world signals in terms of signal models. There are several ways to approach this problem in general. First of all, a signal model can provide the basis for a theoretical description of a signal processing system which can itself be used to characterize the signal in terms of its output. For example if we are interested in enhancing a speech signal corrupted by noise and transmission distortion, we might first model the speech signal as a pure sine wave and then try to remove the noise and undo the transmission distortion. A second reason why signal models are important is that they can be used to study the properties of the signal. In particular, if we are interested in the properties of the signal which produced the signal without having to have the source available, this property is especially important. The cost of getting signals from the actual source is high.

Manuscript received January 15, 1988; revised October 4, 1988. The author is with AT&T Bell Laboratories, Murray Hill, NJ 07974, USA. IEEE Log Number 8823949.

In this case, with a good signal model, we can simulate the source and learn as much as possible via simulations. Finally, the most important reason why signal models are important is that they often provide a means of inputs, and enable us to realize important practical systems—e.g., prediction systems, recognition systems, identification systems, etc.

There are several possible choices for what type of signal model is used for characterizing the properties of a given signal. One choice is to use a deterministic model of signal models into the class of deterministic models, and the class of statistical models. Deterministic models generally exploit the fact that the signal is a pure sine wave, or a sum of exponentials, etc. In these cases, specification of the signal model is generally straightforward; all that is required is to determine the parameters of the components of the signal model (e.g., amplitude, frequency, phase of a sine wave, amplitudes and rates of exponential decay, etc.). The second broad class of signal models is the set of statistical models in which one tries to characterize only the statistical properties of the signal. Examples of such statistical models include Gaussian processes, Poisson processes, Markov processes, and hidden Markov processes, among others. The underlying assumption of the statistical models is that the signal can be well characterized as a parameterized process, and that the parameters of the stochastic process can be determined (estimated) in a precise, well-defined manner.

The area of signal processing of interest, namely speech processing, both deterministic and stochastic signal models have had good success. In this paper we will concern ourselves with the stochastic models of speech processing, namely the hidden Markov model (HMM). (These models are referred to as Markov sources or probability functions of Markov chains, among others.) We will first review the theory of Markov chains and then extend the ideas to the class of hidden Markov models using several simple examples. We will then focus our attention on the three fundamental problems for HMM design, namely: the

0018-9219/89/0200-025/\$1.00 © 1989 IEEE

297

Fig. 5. Document layout: scientific paper 1/2

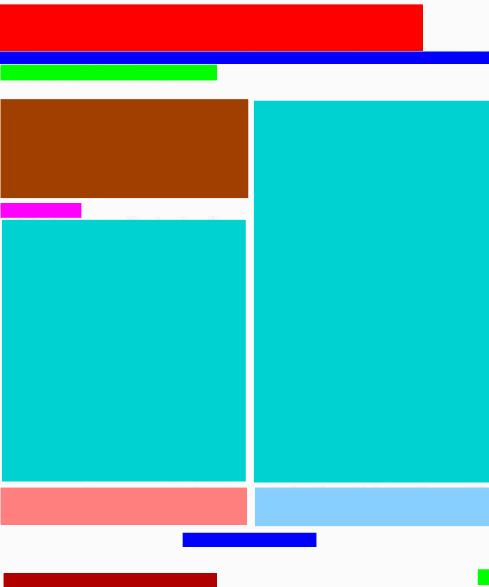


Fig. 6. Document layout: scientific paper 2/2



Fig. 7. Document layout: mail envelope 1/2

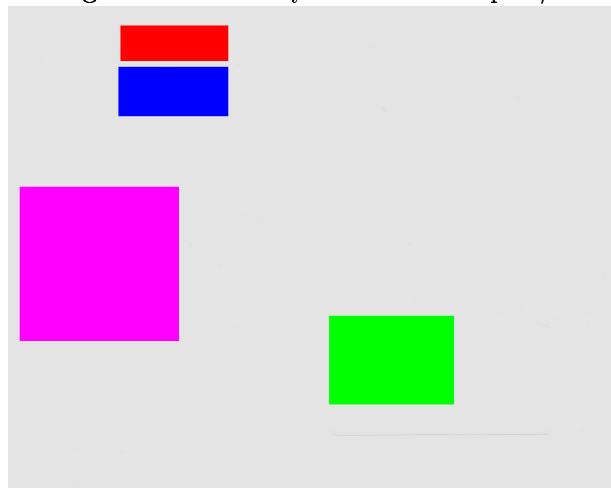


Fig. 8. Document layout: mail envelope 2/2

Rijksuniversiteit Groningen	Faculteit der Psychologische, Pedagogische en Sociologische Wetenschappen
AIO's PPSW	Grote Kruisstraat 2/1 9712 TS Groningen Telefoon (050) 363 61 82 Telefax (050) 363 08 44
Datum	Omschrijving
6 november 2003	P&Q/03.1597
Onderwerp	Uw kenmerk
Projectmatig Werken	Uw kenmerk

Fig. 9. Document layout: letter 1/2

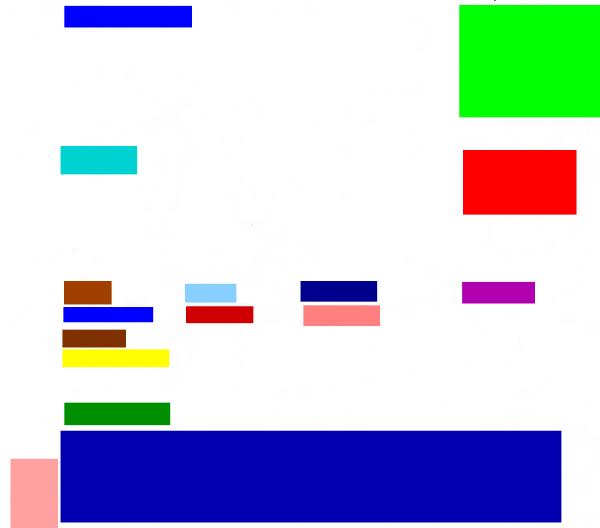


Fig. 10. Document layout: letter 2/2